

KOALA

PRODUCT BROCHURE



Flexible Wood Flooring Adhesive

Koala EstroBond 75 is a high-performance single component, moisture-curing polyurethane adhesive with very low emission of volatile organic compounds (VOC) and green star rating. It has been specially designed for parquet flooring, laminated flooring, paving woodblocks, resin impregnated parquet flooring, standing timber and varnished parquet flooring, plywood parquet flooring and other types (such as that of teak, bamboo, etc.), and cork underlays. It has an excellent adhesion to most substrates such as wood, concrete, stone.

Features

- Excellent bonding strength
- Moisture resistant
- Green star compliant
- High acoustic properties
- Suitable over radiant heating
- Easy to spread
- Free of solvent

Packaging: 12L in Drums and 20x600ml in boxes



Universal Flooring Adhesive

Koala EstroBond A80 is a water-based adhesive with high-performance and strong initial tack qualities, formulated for bonding a range of PVC and rubber floor coverings to most common substrates such as concrete, timber, metal, and carpets with PVC backings.

Features

- Durable
- High strength
- Strong initial tack
- Ready mixed, easy to apply
- Excellent dimensional stability
- Low VOC
- Green star compliant

Packaging: 5Kg and 15 Kg in Drums



Professional Stainless Adhesive Trowels

Koala 5.5/3.5mm Professional V-Notch Trowel is ideal for adhesive application of Koala EstroBond 75 Wood Adhesive. Right-handed v-notched trowel is specially designed for spreading adhesive on the floorboard.

- Rubber ergonomic contoured grip
- Premium grade stainless steel blade

Dimensions

270x110mm
5.5mm and 3.5mm V-Notch



Koala U900 Self Levelling Compound

Koala U900 is a premium polymer-based floor levelling compound that can be applied to level uneven construction substrates. It is a quick-setting solution with low shrinkage and no cracking properties which makes it ideal for use on interior floors for residential and commercial properties.

Features

- High flow
- Ultra rapid setting and drying
- Easy to install
- 4 hours walk on time (+20°C)
- Level from 1mm-10mm in one application
- Very Low VOC

Packaging: 20Kg/Bag



Koala S50 & S100 Primer

S50 is a versatile acrylic based primer to enhance adhesion of levelling compounds on **porous substrates** such as levelling compounds, concrete, brick, limestone and terrazzo – for exterior or interior use. Additionally, it has very low emission of volatile organic compounds.

S100 is for **non-porous substrates** such as vinyl, particleboard, tile, levelling compounds, metal, rubber, hard wood and terrazzo – for exterior or interior use. Additionally, it has very low emission of volatile organic compounds.

Koala S50/S100 is recommended to be used with Koala self-levelling cement.

Features

- Excellent in bonding
- Solvent-free
- Moisture resistant
- Fast drying
- Easy to apply
- Low VOC

Packaging: 5L and 20L in Drums




Koala Punched Underlay

Koala Silent Punched Underlay can be used to bond solid timber and floating floors in residential and commercial buildings. The underlay is a high-quality polyethylene foam mat with symmetrically distributed cut outs. It provides an excellent sound damping effect improving the acoustic performance in rooms.

Features

- The underlay is made of cutting edge IXPE (Irradiated Cross-Linked Polyethylene), the newest advance in foam technology.
- It is 100% waterproof and impervious to mildew, mold, rot and bacteria
- Excellent sound dampening properties

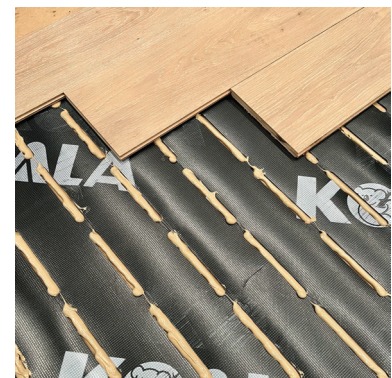

Packaging: 20sqm/ roll

Cerno CL70 Self Levelling Compound

Cerno CL70 is an advanced polymer-based smoothing levelling compound designed to level uneven sub-floors. CL70 is formulated for use on interior floors for residential and commercial properties.

Features

- Fast automatic Levelling, high flow
- Easy to install
- Walkable from 4-6 hours
- Level from 2mm-30mm in one application
- No sanding required
- Flexible – hand mix or pump application

Packaging: 20Kg/Bag



Cerno Primer 150 Multipurpose Primer

Cerno S150 is an environmental-friendly primer synthesized by styrene and acrylic emulsion. It has the characteristics of fine particle, strong sealing and excellent permeability to enhance adhesion of levelling compounds on porous and non-porous substrates.

Features

- High adhesion to various substrates
- Solvent-free
- Moisture resistant
- Fast drying
- Ready to use for non-porous substrates
1:1 diluted for porous substrates

Packaging: 5L and 20L in Drums



Koala Flooring Accessories

Email: office@koalaflooringaccessories.com.au

Web: www.koalaflooringaccessories.com.au